






REC 30

THE COMFORT-BACKED, NO WAX ALTERNATIVE TO VCT

Ideal for cafeterias, break rooms, recess rooms, classrooms, hallways, gymnasiums, and more

- ▶ 0.13" (3 mm) thick with 0.03" (0.7 mm) pure vinyl wearlayer
- ▶ Commercial grade sheet flooring
- ▶ Meets ASTM F2772 Class 1 for indoor sports properties
- ▶ PUR Protect® surface treatment for ease of maintenance and reduced maintenance cost
- ▶ No wax, no buff for life


| 6'6" | | 100% recyclable

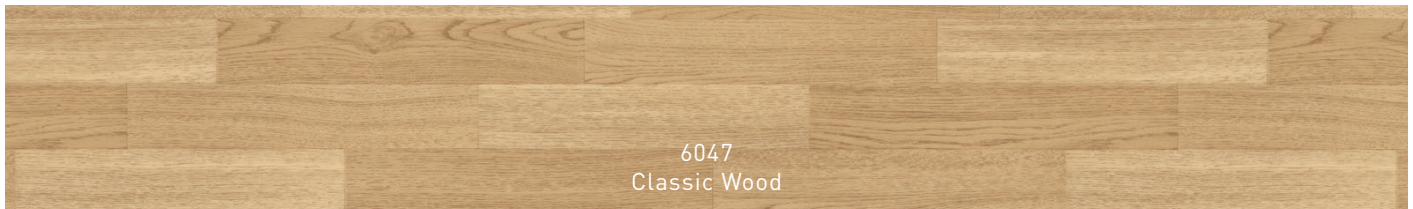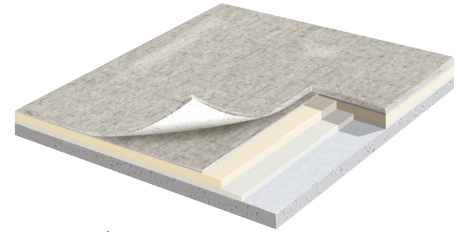


6047
Classic Wood




6045
Golden Wood

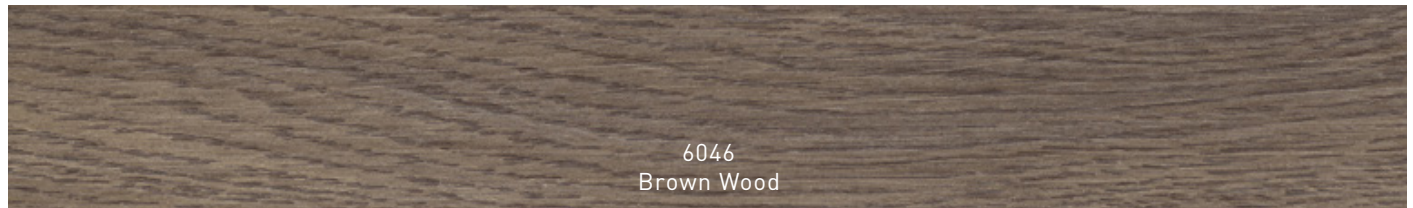


6046
Brown Wood

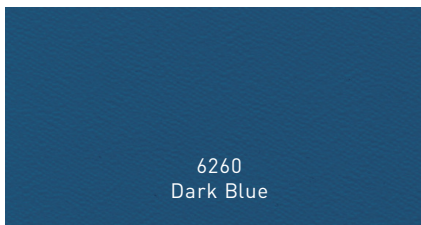


6260
Dark Blue

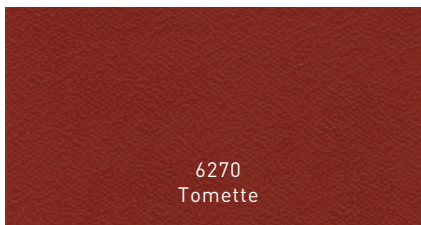


6270
Tomette

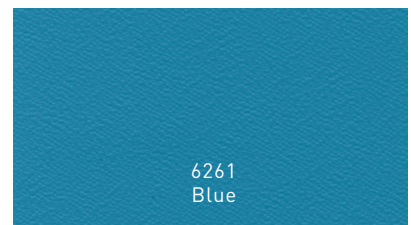

6261
Blue

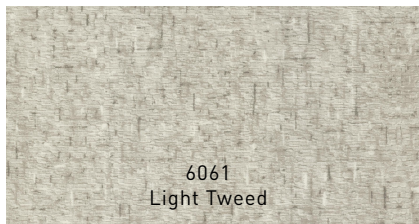

6061
Light Tweed

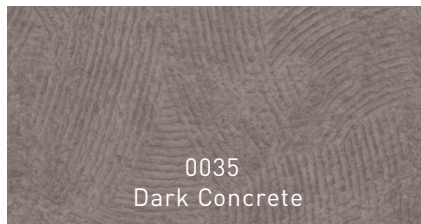

0035
Dark Concrete



6271
Grey

REC 30

THE COMFORT-BACKED, NO WAX ALTERNATIVE TO VCT



6'6"



100% recyclable

DESCRIPTION	STANDARDS	REQUIREMENTS	WOOD, TEXTILE, & CONCRETE DESIGNS	SOLID COLORS
PRODUCT DESCRIPTION				
Reference Specification	ASTM F1303	-	Type 1, Grade 1	Type 1, Grade 1
Surface Treatment	-	-	PUR Protect® UV Factory Applied	PUR Protect® UV Factory Applied
Foam	ASTM F1303	-	Class C: Cushion Foam Backing	Class C: Cushion Foam Backing
Total Thickness	ASTM F386	-	0.13" (3.2 mm)	0.12" (3 mm)
Total Wearlayer	ASTM F410	-	0.03" (0.7 mm)	0.03" (0.7 mm)
Roll Width	-	-	6' 6" (2 m)	
Roll Length	-	-	82' (25 m)	82' (25 m)
Weight	-	-	0.59 lb/ft ² (2.9 kg/m ²)	0.47 lb/ft ² (2.3 kg/m ²)
TECHNICAL CHARACTERISTICS				
Sport Properties	ASTM F2772	Class 1	Class 1	Class 1
Force Reduction/ Cushioning	ASTM F2569	≥ 10%	≥ 10% - ≤ 22%	≥ 10% - ≤ 22%
Static Load (175 psi)	ASTM F970	≤ 0.005"	≤ 0.002" (0.05 mm)	≤ 0.002" (0.05 mm)
Static Load (250 psi)	ASTM F970	-	≤ 0.003" (0.07 mm)	≤ 0.003" (0.07 mm)
Impact Sound Insulation	EN ISO 171-2	-	18 dB	17 dB
Fire Rating	ASTM E648	Class 1	Class 1	Class 1
SUSTAINABILITY HEALTH & SAFETY				
Antimicrobial Treatment	-	-	PUR Protect®	PUR Protect®
Antibacterial: Combats MRSA, E. Coli, and S. Aureus*	ISO 22196	-	Inhibits the spread of bacteria at 99%	Inhibits the spread of bacteria at 99%
Allergen Free	-	-	OK	OK
Indoor Air Quality / Low Emitting Materials	EQc2 LEED v4	-	FloorScore®	FloorScore®
TVOC After 28 Days	ISO 16000-6	-	<100 µg/m ³	<100 µg/m ³
Ease of Maintenance	-	-	No Wax, No Buff for Life / PUR Protect®	No Wax, No Buff for Life / PUR Protect®
Plant Certifications	-	-	ISO 14001 and ISO 9001	ISO 14001 and ISO 9001
Restriction Use of Harmful Chemicals	MRc4 LEEDv4	-	Complies with REACH	Complies with REACH
Production Waste	-	-	100% Manufacturing Waste Recycled	100% Manufacturing Waste Recycled
Recycled Content	MRc3 LEED v4	-	12%	12%
End of Life	-	-	100% Recyclable	
INSTALLATION METHOD				
Full-Spread Adhesive	ASTM F2170 (F1869)	≤ 80% RH (≤ 5 lb)		
WARRANTY	10-year limited manufacturer warranty when installed in accordance with Gerflor's installation instructions.			

*The implementation of an effective cleaning method is the best defense against infection.