


Product Sales Sheet

Everlast UltraTile®

UltraTile is designed with a patented “ultra” high-density wear layer on a molded base. This 24-by-24-by-1-inch modular tile offers enhanced impact absorption in moderate to extreme weight drop applications



Proprietary
Installation System
Quad Blok



Markets

- Fitness
- Sports
- Student Rec

Applications

- Olympic lifting weight area

Benefits

- 15 year warranty
- Enhanced impact absorption
- Easy installation with Quad Blok
- Slip resistant, wet or dry
- Extremely durable
- Custom color and logo options



Product Options

Size:

Available as a standard in tiles. All custom options should be discussed with your local agent to determine availability, pricing, minimums, and lead times.



Tile:
1" x 24" (61cm) x 24" (61cm)



Reducers:
4" (102mm) x 48" (1.22m)
Thickness: 1"/25.4mm




ADA Ramp:
12" (305mm) x 48" (1.22m)
Thickness: 1" (25.4mm)



Quad Blok:
½" H x 4 ¾" x 4 ¾"
Adhesive = 1 Tube / 15 Quad Bloks

Quad Blok:



Color Options:

- More than 15 color options.
- See website for complete listing.



Technical Details

Performance Criteria	Test Standard	Typical Results
Static Load Limit	ASTM F970	0.005" (@400psi)
Coefficient of Friction	ASTM D2047	> 0.9
VOC Compliant	ASTM D5116	
FloorScore	CA 01350	Certified
Abrasion Resistance	ASTM D3389	1 or 0.2 mg loss/cycle
Pill Test	ASTM D2859	Pass
Standard Vertical Deformation	ASTM F2772	
Surface Effect Slip Resistance	ASTM F2772	
Ball Rebound	ASTM F2772	
Force Reduction	ASTM F2772	
Impact Insulation Class*	ASM E492	56
Delta IIC*	ASTM E2179	27

*Tested on a 6" concrete slab with no ceiling.



50.2%


Force Reduction
Absorption of impact energy



47.9%

Energy Restitution
Useful return of impact energy

Values based on Deltec Test

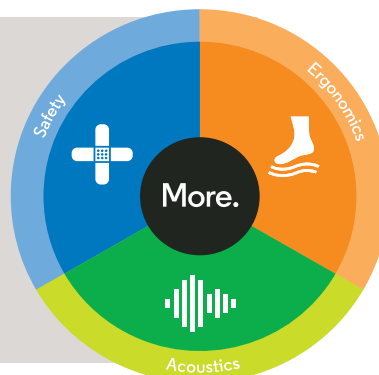

Can a floor
do more?
Yes.